Distributed by:

JAMECO® ELECTRONICS

**www.Jameco.com ✦ 1-800-831-4242**

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 194571

# Plastic Medium-Power Complementary Silicon Transistors

. . . designed for general–purpose amplifier and low–speed switching applications.

- High DC Current Gain –
  $h_{FE}$ = 2500 (Typ) @ $I_C$ = 4.0 Adc
- Collector–Emitter Sustaining Voltage – @ 100 mAdc –
  $V_{CEO(sus)}$ = 60 Vdc (Min) – 2N6040, 2N6043
  = 100 Vdc (Min) – 2N6042, 2N6045
- Low Collector–Emitter Saturation Voltage –
  $V_{CE(sat)}$ = 2.0 Vdc (Max) @ $I_C$ = 4.0 Adc – 2N6043,44
  = 2.0 Vdc (Max) @ $I_C$ = 3.0 Adc – 2N6042, 2N6045
- Monolithic Construction with Built–In Base–Emitter Shunt Resistors

**PNP**
**2N6040**
**2N6042**
**2N6043***
**NPN**
**2N6045***

*ON Semiconductor Preferred Device

**DARLINGTON**
**8 AMPERE**
**COMPLEMENTARY**
**SILICON**
**POWER TRANSISTORS**
**60–100 VOLTS**
**75 WATTS**




**CASE 221A–09**
**TO–220AB**

**MAXIMUM RATINGS (1)**

| Rating | Symbol | 2N6040 2N6043 | 2N6042 2N6045 | Unit |
|---|---|---|---|---|
| Collector–Emitter Voltage | $V_{CEO}$ | 60 | 100 | Vdc |
| Collector–Base Voltage | $V_{CB}$ | 60 | 100 | Vdc |
| Emitter–Base Voltage | $V_{EB}$ | 5.0 | | Vdc |
| Collector Current – Continuous<br>Peak | $I_C$ | 8.0<br>16 | | Adc |
| Base Current | $I_B$ | 120 | | mAdc |
| Total Power Dissipation @ $T_C$ = 25°C<br>Derate above 25°C | $P_D$ | 75<br>0.60 | | Watts<br>W/°C |
| Operating and Storage Junction, Temperature Range | $T_J$, $T_{stg}$ | –65 to +150 | | °C |

**THERMAL CHARACTERISTICS**

| Characteristic | Symbol | Max | Unit |
|---|---|---|---|
| Thermal Resistance, Junction to Case | $\theta_{JC}$ | 1.67 | °C/W |
| Thermal Resistance, Junction to Ambient | $\theta_{JA}$ | 57 | °C/W |

(1) Indicates JEDEC Registered Data.




**Figure 1. Power Derating**

**Preferred** devices are ON Semiconductor recommended choices for future use and best overall value.

© Semiconductor Components Industries, LLC, 2002

April, 2002 – Rev. 4
Publication Order Number:
2N6040/D

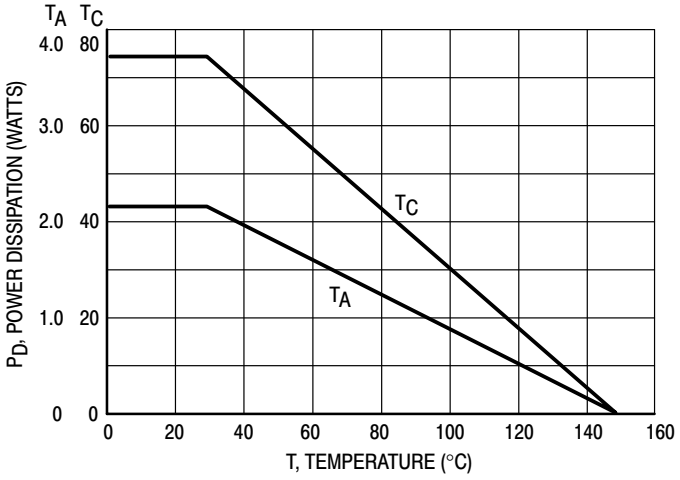***ELECTRICAL CHARACTERISTICS** ($T_C$ = 25°C unless otherwise noted)

| Characteristic | | Symbol | Min | Max | Unit |
|---|---|---|---|---|---|
| **OFF CHARACTERISTICS** | | | | | |
| Collector–Emitter Sustaining Voltage ($I_C$ = 100 mAdc, $I_B$ = 0) | 2N6040, 2N6043 | $V_{CEO(sus)}$ | 60 | – | Vdc |
| | 2N6042, 2N6045 | | 100 | – | |
| Collector Cutoff Current | | $I_{CEO}$ | | | μA |
| ($V_{CE}$ = 60 Vdc, $I_B$ = 0) | 2N6040, 2N6043 | | – | 20 | |
| ($V_{CE}$ = 100 Vdc, $I_B$ = 0) | 2N6042, 2N6045 | | – | 20 | |
| Collector Cutoff Current | | $I_{CEX}$ | | | μA |
| ($V_{CE}$ = 60 Vdc, $V_{BE(off)}$ = 1.5 Vdc) | 2N6040, 2N6043 | | – | 20 | |
| ($V_{CE}$ = 100 Vdc, $V_{BE(off)}$ = 1.5 Vdc) | 2N6042, 2N6045 | | – | 20 | |
| ($V_{CE}$ = 60 Vdc, $V_{BE(off)}$ = 1.5 Vdc, $T_C$ = 150°C) | 2N6040, 2N6043 | | – | 200 | |
| ($V_{CE}$ = 80 Vdc, $V_{BE(off)}$ = 1.5 Vdc, $T_C$ = 150°C) | 2N6041, 2N6044 | | – | 200 | |
| ($V_{CE}$ = 100 Vdc, $V_{BE(off)}$ = 1.5 Vdc, $T_C$ = 150°C) | 2N6042, 2N6045 | | – | 200 | |
| Collector Cutoff Current | | $I_{CBO}$ | | | μA |
| ($V_{CB}$ = 60 Vdc, $I_E$ = 0) | 2N6040, 2N6043 | | – | 20 | |
| ($V_{CB}$ = 100 Vdc, $I_E$ = 0) | 2N6042, 2N6045 | | – | 20 | |
| Emitter Cutoff Current ($V_{BE}$ = 5.0 Vdc, $I_C$ = 0) | | $I_{EBO}$ | – | 2.0 | mAdc |
| **ON CHARACTERISTICS** | | | | | |
| DC Current Gain | | $h_{FE}$ | | | – |
| ($I_C$ = 4.0 Adc, $V_{CE}$ = 4.0 Vdc) | 2N6040, 2N6043, | | 1000 | 20.000 | |
| ($I_C$ = 3.0 Adc, $V_{CE}$ = 4.0 Vdc) | 2N6042, 2N6045 | | 1000 | 20,000 | |
| ($I_C$ = 8.0 Adc, $V_{CE}$ = 4.0 Vdc) | All Types | | 100 | – | |
| Collector–Emitter Saturation Voltage | | $V_{CE(sat)}$ | | | Vdc |
| ($I_C$ = 4.0 Adc, $I_B$ = 16 mAdc) | 2N6040, 2N6043, | | – | 2.0 | |
| ($I_C$ = 3.0 Adc, $I_B$ = 12 mAdc) | 2N6042, 2N6045 | | – | 2.0 | |
| ($I_C$ = 8.0 Adc, $I_B$ = 80 Adc) | All Types | | – | 4.0 | |
| Base–Emitter Saturation Voltage ($I_C$ = 8.0 Adc, $I_B$ = 80 mAdc) | | $V_{BE(sat)}$ | – | 4.5 | Vdc |
| Base–Emitter On Voltage ($I_C$ = 4.0 Adc, $V_{CE}$ = 4.0 Vdc) | | $V_{BE(on)}$ | – | 2.8 | Vdc |
| **DYNAMIC CHARACTERISTICS** | | | | | |
| Small Signal Current Gain ($I_C$ = 3.0 Adc, $V_{CE}$ = 4.0 Vdc, f = 1.0 MHz) | | $\|h_{fe}\|$ | 4.0 | – | |
| Output Capacitance | 2N6040/2N6042 | $C_{ob}$ | – | 300 | pF |
| ($V_{CB}$ = 10 Vdc, $I_E$ = 0, f = 0.1 MHz) | 2N6043/2N6045 | | – | 200 | |
| Small–Signal Current Gain ($I_C$ = 3.0 Adc, $V_{CE}$ = 4.0 Vdc, f = 1.0 kHz) | | $h_{fe}$ | 300 | – | – |

*Indicates JEDEC Registered Data.




**Figure 2. Switching Times Equivalent Circuit**




**Figure 3. Switching Times**

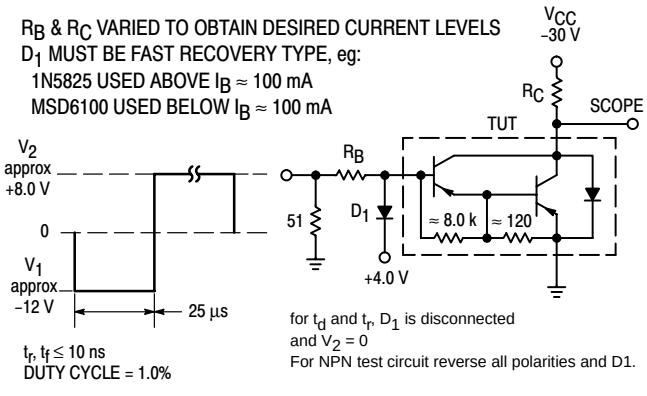


**Figure 4. Thermal Response**

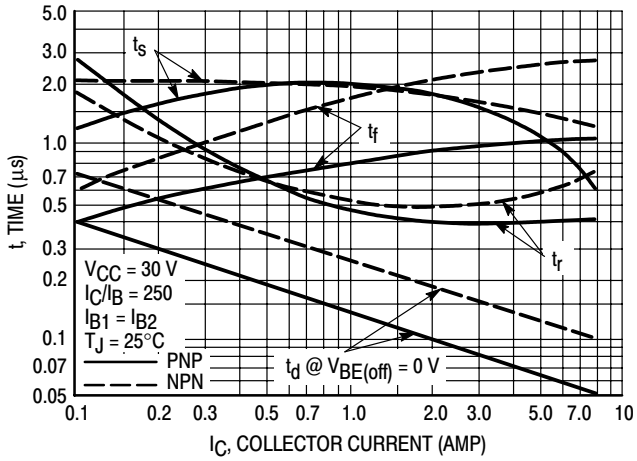


**Figure 5. Active−Region Safe Operating Area**

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

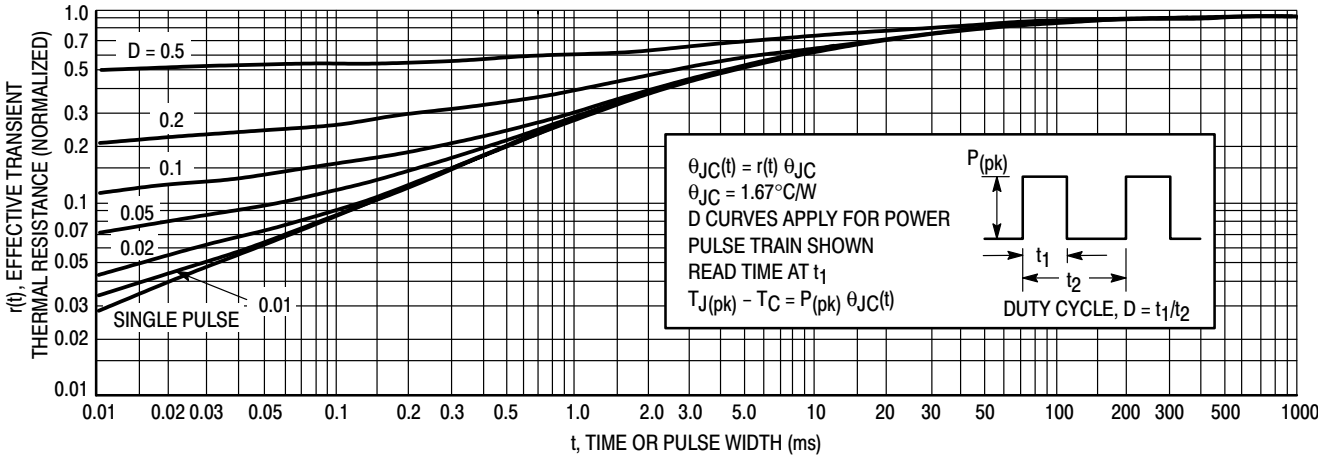The data of Figure 5 is based on $T_{J(pk)} = 150°C$; $T_C$ is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 150°C$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

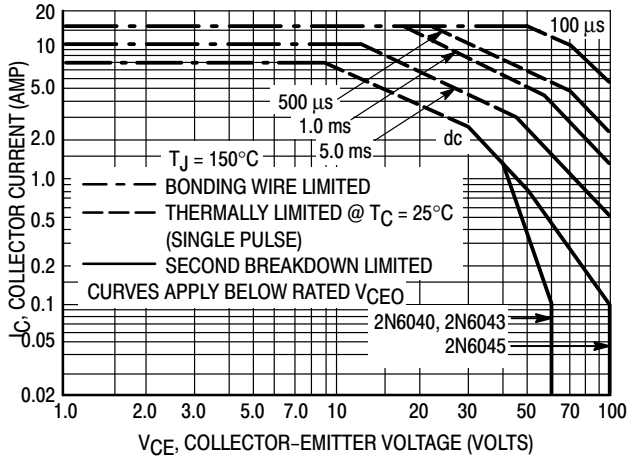


**Figure 6. Small−Signal Current Gain**




**Figure 7. Capacitance**

**PNP**
**2N6040, 2N6042**

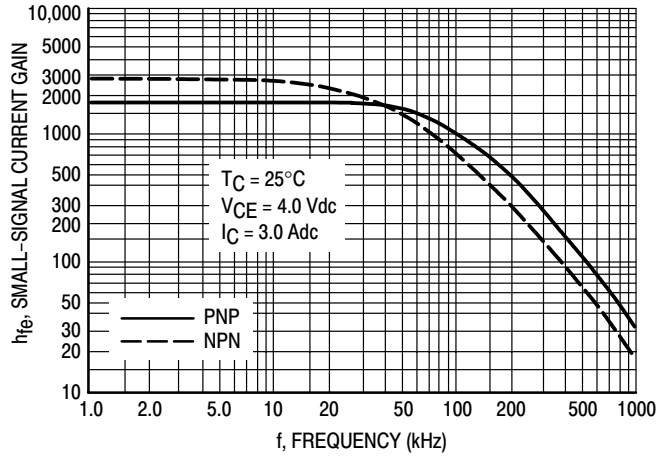


**NPN**
**2N6043, 2N6045**

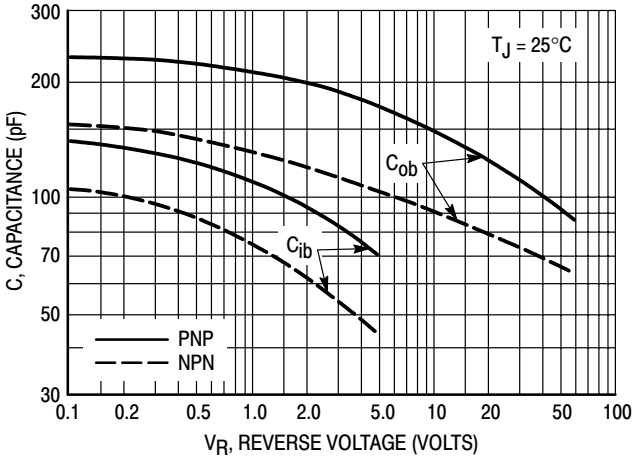


**Figure 8. DC Current Gain**




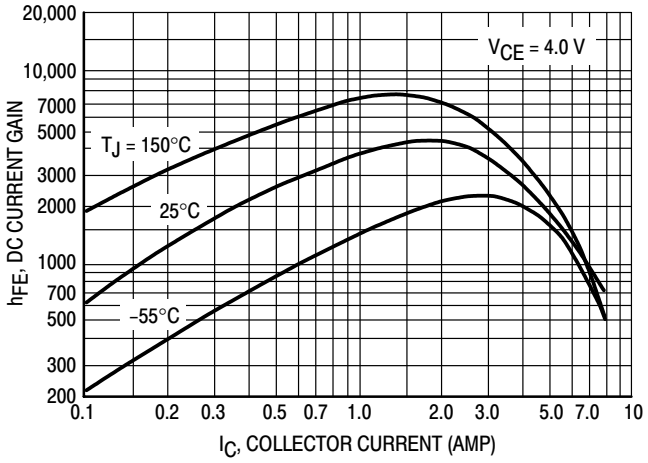


**Figure 9. Collector Saturation Region**

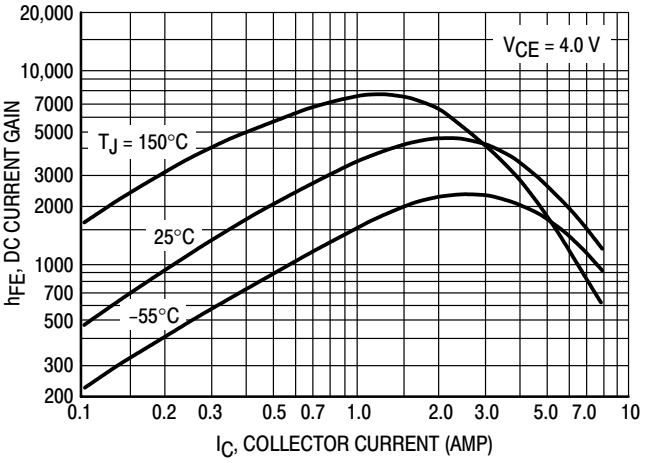


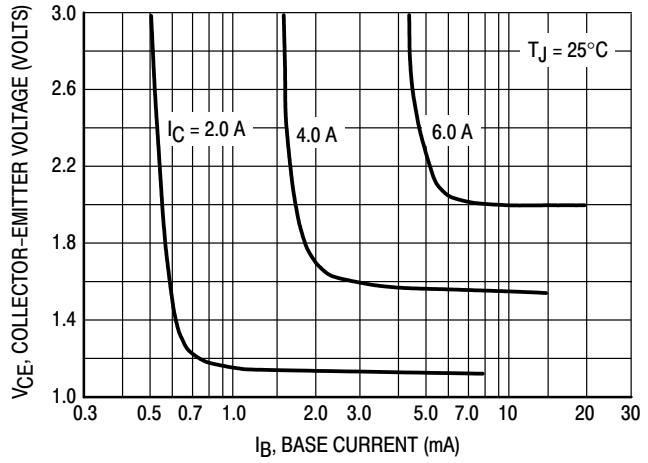


**Figure 10. “On” Voltages**
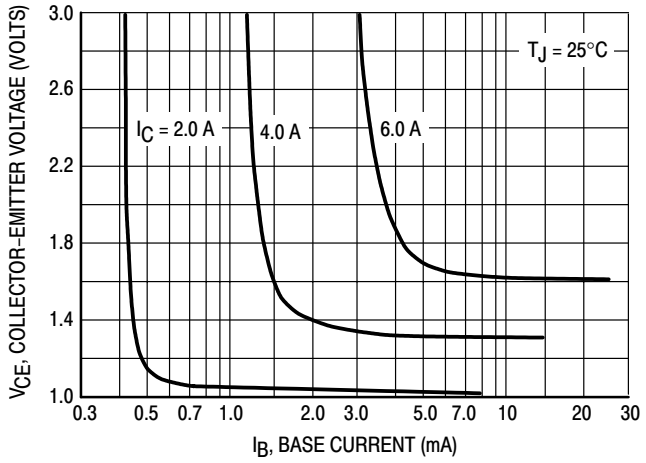
## PACKAGE DIMENSIONS

**TO−220AB**
**CASE 221A−09**
**ISSUE AA**

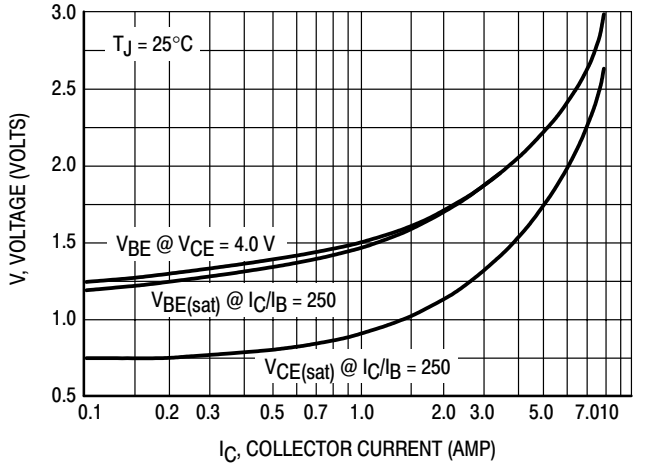


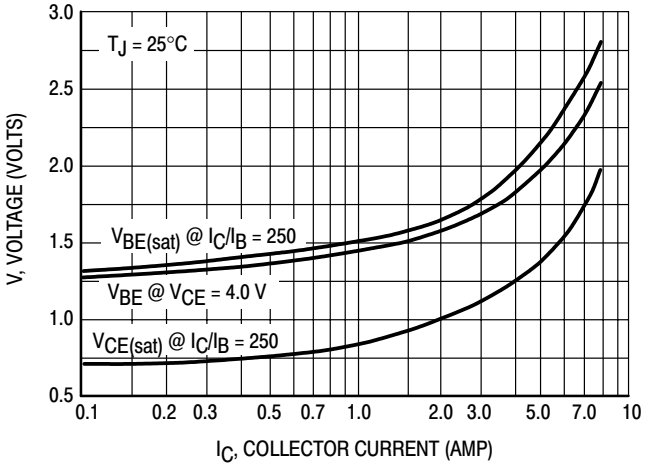STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

| | INCHES | | MILLIMETERS | |
|---|---|---|---|---|
| DIM | MIN | MAX | MIN | MAX |
| A | 0.570 | 0.620 | 14.48 | 15.75 |
| B | 0.380 | 0.405 | 9.66 | 10.28 |
| C | 0.160 | 0.190 | 4.07 | 4.82 |
| D | 0.025 | 0.035 | 0.64 | 0.88 |
| F | 0.142 | 0.147 | 3.61 | 3.73 |
| G | 0.095 | 0.105 | 2.42 | 2.66 |
| H | 0.110 | 0.155 | 2.80 | 3.93 |
| J | 0.018 | 0.025 | 0.46 | 0.64 |
| K | 0.500 | 0.562 | 12.70 | 14.27 |
| L | 0.045 | 0.060 | 1.15 | 1.52 |
| N | 0.190 | 0.210 | 4.83 | 5.33 |
| Q | 0.100 | 0.120 | 2.54 | 3.04 |
| R | 0.080 | 0.110 | 2.04 | 2.79 |
| S | 0.045 | 0.055 | 1.15 | 1.39 |
| T | 0.235 | 0.255 | 5.97 | 6.47 |
| U | 0.000 | 0.050 | 0.00 | 1.27 |
| V | 0.045 | --- | 1.15 | --- |
| Z | --- | 0.080 | --- | 2.04 |

# Notes
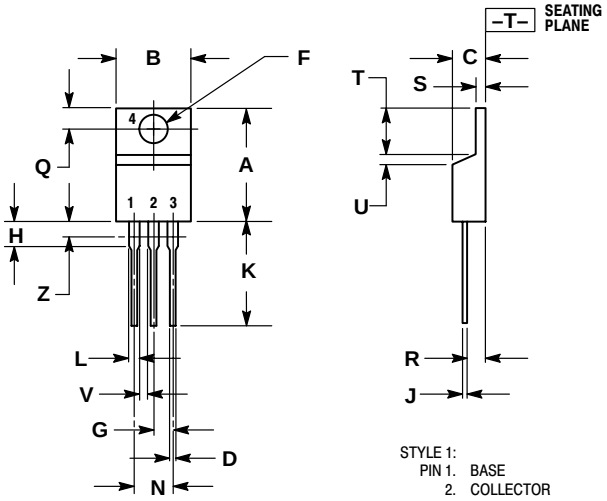
# Notes

**ON Semiconductor** and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

## PUBLICATION ORDERING INFORMATION

**Literature Fulfillment**:
Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
**Phone**: 303–675–2175 or 800–344–3860 Toll Free USA/Canada
**Fax**: 303–675–2176 or 800–344–3867 Toll Free USA/Canada
**Email**: ONlit@hibbertco.com

**N. American Technical Support**: 800–282–9855 Toll Free USA/Canada

**JAPAN**: ON Semiconductor, Japan Customer Focus Center
4–32–1 Nishi–Gotanda, Shinagawa–ku, Tokyo, Japan 141–0031
**Phone**: 81–3–5740–2700
**Email**: r14525@onsemi.com

**ON Semiconductor Website**: http://onsemi.com

For additional information, please contact your local
Sales Representative.